



### ■特點(FEATURES)

- 精確度0.1%滿刻度 (Accuracy 0.1% F.S)
- 多種輸入輸出選擇(Wide selection of input/output range)
- 三線式接線自動補償線路阻抗效應(3 wire configuration automatically compensate line resistance effects)
- 寬範圍交直流兩用電源設計(Wide input range for auxiliary power)
- 尺寸小,穩定性高(Dimension small and High stability)

### 1.MODEL:TP-□ □ □ (選購型號)


NO	Input Range	NO	Input Range	NO	Input Range	NO	Output Range	NO	Output Range	NO	Output Range	NO	Aux. Power
1	0-50 ℃	4	0-400 ℃	7	-100-+100 ℃	A	0-50mV	E	2-10V	I	4-20mA	A	AC/DC 18-60V
2	0-100 ℃	5	0-800 ℃	9	SPECIFIED	B	0-1V	F	0-1mA	R	SPECIFIED	B	AC/DC 90-260V
3	0-200 ℃	6	-50 ℃-+50 ℃			C	1-5V	G	0-10mA				• Less 3VA for AC/DC input
						D	0-10V	H	0-20mA				

• DIN standard (TCR:385ppm/℃)

### 2.SPECIFICATION (主要規格)

- Measuring accuracy : 0.1% F.S. (23 ± 5 ℃)  
(精確度)
- Sensing current : 2mA(<0.2V)  
(感應器電流)
- Response time : < 250ms (0-90%)  
(輸出反應時間)
- Output drive capability : < 10mA for voltage mode  
(輸出負載能力) < 10V for current mode
- Output ripple(p-p) : < 0.1% F.S.  
(輸出漣波)
- Zero (offset) range : 0- ± 5% F.S.  
(歸零調整範圍)
- Span (scale) range : 0- ± 10% F.S.  
(最大值調整範圍)
- Temp. coefficient : 100ppm/℃ (0-50 ℃)  
(溫度係數)
- Isolation : Input/Output/Power/Case  
(隔離特性)
- Insulation Resistance : >100Mohm with 500V DC  
(絕緣阻抗)
- Dielectric strength : 2KVac/1 min. (input/output/power)  
(絕緣耐壓能力) 1600Vdc (input/output)
- Operating condition : 0-50 ℃ (20 to 90% RH non-condensed)  
(使用環境條件)
- Storage condition : 0-70 ℃ (20 to 90% RH non-condensed)  
(存放環境條件)
- Construction : Socket/plugin type with barrier terminals  
(安裝方式)

### 3.Terminal connection(接線圖)

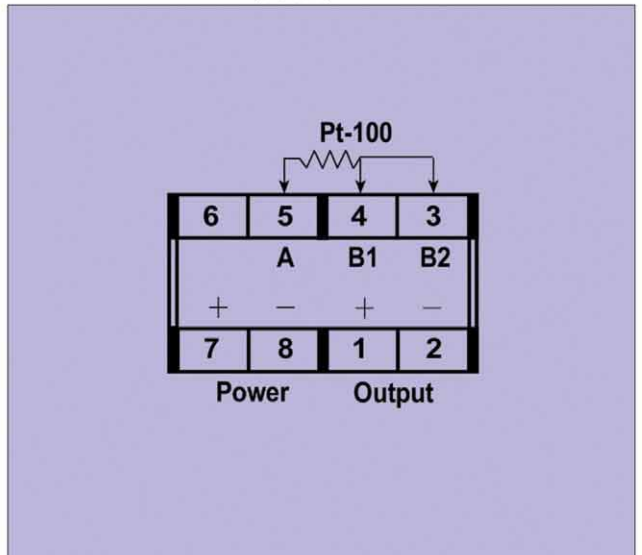

### 4.Dimension(unit:mm)(外型尺寸)

